

Valve Inspection and Testing

API STANDARD 598
ELEVENTH EDITION, FEBRUARY 2023



Special Notes

API publications necessarily address problems of a general nature. With respect to particular circumstances, local, state, and federal laws and regulations should be reviewed.

Neither API nor any of API's employees, subcontractors, consultants, committees, or other assignees make any warranty or representation, either express or implied, with respect to the accuracy, completeness, or usefulness of the information contained herein, or assume any liability or responsibility for any use, or the results of such use, of any information or process disclosed in this publication. Neither API nor any of API's employees, subcontractors, consultants, or other assignees represent that use of this publication would not infringe upon privately owned rights.

API publications may be used by anyone desiring to do so. Every effort has been made by the Institute to ensure the accuracy and reliability of the data contained in them; however, the Institute makes no representation, warranty, or guarantee in connection with this publication and hereby expressly disclaims any liability or responsibility for loss or damage resulting from its use or for the violation of any authorities having jurisdiction with which this publication may conflict.

API publications are published to facilitate the broad availability of proven, sound engineering and operating practices. These publications are not intended to obviate the need for applying sound engineering judgment regarding when and where these publications should be used. The formulation and publication of API publications is not intended in any way to inhibit anyone from using any other practices.

Any manufacturer marking equipment or materials in conformance with the marking requirements of an API standard is solely responsible for complying with all the applicable requirements of that standard. API does not represent, warrant, or guarantee that such products do in fact conform to the applicable API standard.

Users of this standard should not rely exclusively on the information contained in this document. Sound business, scientific, engineering, and safety judgment should be used in employing the information contained herein.

API is not undertaking to meet the duties of employers, manufacturers, or suppliers to warn and properly train and equip their employees, and others exposed, concerning health and safety risks and precautions, nor undertaking their obligations to comply with authorities having jurisdiction.

All rights reserved. No part of this work may be reproduced, translated, stored in a retrieval system, or transmitted by any means, electronic, mechanical, photocopying, recording, or otherwise, without prior written permission from the publisher. Contact the Publisher, API Publishing Services, 200 Massachusetts Avenue, NW, Suite 1100, Washington, DC 20001-5571.

Foreword

Nothing contained in any API publication is to be construed as granting any right, by implication or otherwise, for the manufacture, sale, or use of any method, apparatus, or product covered by letters patent. Neither should anything contained in the publication be construed as insuring anyone against liability for infringement of letters patent.

Shall: As used in a standard, “shall” denotes a minimum requirement to conform to the standard.

Should: As used in a standard, “should” denotes a recommendation or that which is advised but not required to conform to the standard.

May: As used in a standard, “may” denotes a course of action permissible within the limits of a standard.

Can: As used in a standard, “can” denotes a statement of possibility or capability.

This document was produced under API standardization procedures that ensure appropriate notification and participation in the developmental process and is designated as an API standard. Questions concerning the interpretation of the content of this publication or comments and questions concerning the procedures under which this publication was developed should be directed in writing to the Director of Standards, American Petroleum Institute, 1220 L Street, NW, Washington, DC 20005. Requests for permission to reproduce or translate all or any part of the material published herein should also be addressed to the director.

Generally, API standards are reviewed and revised, reaffirmed, or withdrawn at least every five years. A one-time extension of up to two years may be added to this review cycle. Status of the publication can be ascertained from the API Standards Department, telephone (202) 682-8000. A catalog of API publications and materials is published annually by API, 1220 L Street, NW, Washington, DC 20005.

Suggested revisions are invited and should be submitted to the Standards Department, API, 1220 L Street, NW, Washington, DC 20005, standards@api.org.

Contents

	Page
1	Scope..... 1
2	Normative References 1
3	Terms and Definitions 2
4	Inspection, Examination, and Supplementary Examination..... 3
4.1	Inspection at the Valve Manufacturer’s Plant..... 3
4.2	Inspection Outside the Valve Manufacturer’s Plant 3
4.3	Inspection Notice 3
4.4	Extent of Inspection 3
4.5	Examination 3
4.6	Supplementary Examination 4
5	Pressure Tests 4
5.1	Test Location..... 4
5.2	Test Equipment 4
5.3	Tests Required..... 4
5.4	High-pressure Closure Test 5
5.5	High-pressure Pneumatic Shell Test..... 5
5.6	Test Fluid 6
5.7	Test Pressures 6
5.8	Test Duration..... 6
5.9	Test Leakage 9
6	Pressure Test Procedures..... 11
6.1	General 11
6.2	Backseat Test..... 11
6.3	Shell Test 12
6.4	Low-pressure Closure Test 12
6.5	High-pressure Closure Test 13
6.6	Double Block and Bleed Successive High- pressure Closure Test..... 13
6.7	Double Block and Bleed Simultaneous High-pressure Closure Test 13
7	Valve Certification and Retesting 13
7.1	Certificate of Compliance..... 13
7.2	Retesting..... 13
7.3	Material Test Report..... 13
	Annex A (informative) Information to Be Specified by the Purchaser 15
	Bibliography..... 16
 Figures	
1	Volumetric Device 11

Contents

Page

Tables

1	Pressure Tests	5
2	Shell Test Pressures	7
3	Backseat and Closure Test Pressures	8
4	Duration of Required Test Pressure.....	8
5	Maximum Allowable Leakage Rates for Closure Tests	10

Valve Inspection and Testing

1 Scope

1.1 This standard covers inspection, examination, supplementary examinations, and pressure test requirements for resilient-seated, nonmetallic-seated (e.g., ceramic), and metal-to-metal-seated valves of the gate, globe, plug, ball, check, and butterfly types. Resilient seats are considered to be:

- a) soft seats, both solid and semisolid grease type (e.g., lubricated plug);
- b) combination soft and metal seats (e.g., laminated seat rings);
- c) any other type of seat material designed to meet resilient seat leakage rates as specified in [Table 5](#).

This standard supplements the API standards that reference it, but it may also be applied to other types of valves by agreement between the purchaser and the valve manufacturer. See [Annex A](#) for information to be specified by the purchaser.

1.2 The inspection requirements pertain to examinations and testing by the valve manufacturer and any supplementary examinations that the purchaser may require at the valve manufacturer's plant. The test requirements cover both required and optional pressure tests at the valve manufacturer's plant or at a facility mutually agreeable to both the manufacturer and the purchaser.

1.3 The following tests and examinations are specified in this standard:

- a) shell test;
- b) backseat test;
- c) low-pressure closure test;
- d) high-pressure closure test;
- e) double block and bleed high-pressure closure test;
- f) visual examination of castings;
- g) high-pressure pneumatic shell test.

2 Normative References

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

API Standard 594, *Check Valves: Flanged, Lug, Wafer and Butt-welding*

API Standard 602, *Gate, Globe, and Check Valves for Sizes DN 100 (NPS 4) and Smaller for the Petroleum and Natural Gas Industries*

API Standard 609, *Butterfly Valves: Double-flanged, Lug- and Wafer-type*

ASME B16.11,¹ *Forged Fittings, Socket-Welding and Threaded*

¹ ASME International, 3 Park Avenue, New York, New York 10016–5990, www.asme.org.

ASME B16.34, *Valves—Flanged, Threaded, and Welding End*

MSS SP-45,² *Bypass and Drain Connections*

MSS SP-55, *Quality Standard for Steel Castings for Valves, Flanges and Fittings and Other Piping Components Visual Method for Evaluation of Surface Irregularities*

MSS-SP-91, *Guidelines for Manual Operation of Valves*

3 Terms and Definitions

For the purposes of this document, the following terms and definitions apply.

3.1

backseat test

A pressure test used to verify leakage past the stem or shaft to bonnet seal (backseat).

3.2

class

A dimensionless number used to designate the pressure-temperature rating of a valve or piping component.

3.3

closure test

A pressure test used to confirm leakage past or through a valve's closure mechanism.

3.4

cold working pressure

CWP

Rated pressure at ambient temperature.

3.5

diameter nominal

DN

An alphanumeric designation of size that is common for components used in a piping system, and that is used for reference purposes. It comprises the letters DN followed by a dimensionless number indirectly related to the physical size of the bore or outside diameter of the end connection as appropriate. The dimensionless number following DN does not represent a measurable value and is not used for calculation purposes, except where specified in ASME B16.34.

3.6

double block and bleed valve

DBB

A single valve with two seating surfaces that, in the closed position, provide a seal against pressure from both ends of the valve with a means of venting/bleeding the cavity between the seating surfaces.

3.7

nominal pipe size

NPS

An alphanumeric designation of size that is common for components used in a piping system, and that is used for reference purposes. It comprises the letters NPS followed by a dimensionless number indirectly related to the physical size of the bore or outside diameter of the end connection as appropriate. The dimensionless size identification number following NPS does not represent a measurable value and is not used for calculation

² Manufacturers Standardization Society of the Valve and Fittings Industry, 127 Park Street, NE, Vienna, Virginia 22180-4602, www.mss-hq.com.

purposes, except where specified in ASME B16.34. Prefix NPS usage is applicable to valves bearing class designations.

3.8

shell test

A pressure test in excess of the cold working pressure (CWP) rating of the valve for the purpose of validating the soundness and strength of the valve pressure-containing structures.

3.9

visually detectable leakage

Leakage during a valve pressure test, either through or past a pressure boundary or closure member that is validated by normal vision.

4 Inspection, Examination, and Supplementary Examination

4.1 Inspection at the Valve Manufacturer's Plant

The purchaser shall specify in the purchase order intention to inspect valves and witness tests and examinations at the valve manufacturer's plant. With proper notification per 4.3, the purchaser's inspector shall have access to any part of the plant concerned with manufacture of the valves whenever work on the order is under way. Witnessing may be performed by remote means (video).

4.2 Inspection Outside the Valve Manufacturer's Plant

When the purchaser specifies that the inspection will include pressure-containing parts or components manufactured at locations other than the valve manufacturer's plant, these parts and components shall be subject to the valve purchaser's inspection at the location where they are manufactured. Witnessing may be performed by remote means (video).

4.3 Inspection Notice

When inspection by the purchaser is specified, the valve manufacturer shall notify the purchaser prior to the required valve testing and any specified supplementary inspections or examinations, addressing the notice as stated in the purchase order or as mutually agreed with the purchaser.

4.4 Extent of Inspection

The extent of inspection may be specified in the purchase order and, unless otherwise indicated, will be limited to the following:

- a) inspection of the valve during assembly to ensure compliance with the specifications of the purchase order;
- b) witnessing of the required and specified optional pressure tests and examinations;
- c) witnessing of any supplementary examinations (see [4.6](#));
- d) review of mill records and nondestructive examination records (including specified radiographs).

4.5 Examination

4.5.1 A visual examination shall be performed by the valve manufacturer on all castings of bodies, bonnets, covers, and closure elements to ensure conformance with MSS SP-55.

4.5.2 Each valve shall be examined to ensure compliance with this standard, purchase order requirements, and the referenced product standard (e.g., API Standard 599⁽¹⁾).

4.5.3 All examinations shall be performed in accordance with written procedures that comply with the applicable standards.

4.6 Supplementary Examination

Supplementary types of examination are required only if specified in the purchase order and only to the extent specified. Magnetic particle, radiographic, liquid penetrant, and ultrasonic examination of castings or forgings shall be in accordance with ASME B16.34 or with the purchaser's own procedures and acceptance criteria, if so specified.

5 Pressure Tests

5.1 Test Location

Pressure tests shall be performed by the valve manufacturer at the valve manufacturer's plant or at a facility mutually agreeable to both the manufacturer and purchaser.

5.2 Test Equipment

The equipment used to perform the required pressure tests shall not apply external forces that affect seat or body seal leakage. If an end-clamping fixture is used, the valve manufacturer shall be able to demonstrate that the test fixture does not affect the seat or body joint sealing capability of the valve being tested. End clamping is allowed for valves designed to function between mating flanges, such as wafer check and wafer butterfly valves.

5.3 Tests Required

5.3.1 The pressure tests listed in [Table 1](#) shall be performed on each valve in accordance with written procedures that comply with this standard.

Table 1—Pressure Tests

Test Description	Size	ASME class	Valve Type					
			Gate	Globe and Parallel Slide Gate	Plug	Butterfly Cat. A ^h and Check	Floating Ball	Butterfly Cat. B ^h and Trunnion Mounted Ball
Shell	All	All	Required	Required	Required	Required	Required	Required
Backseat ^a	All	All	Required	Required	NA	NA	NA	NA
Low-pressure closure	DN (NPS) ≤ DN 100 (NPS 4)	Class ≤ 1500	Required	Optional ^b	Required ^f	Optional ^b	Required	Required
		Class > 1500	Optional ^b		Optional ^b			Optional ^b
	DN (NPS) > DN 100 (NPS 4)	Class ≤ 600	Required		Required ^f			Required
		Class > 600	Optional ^b		Optional ^b			Optional ^b
High-pressure closure ^{c g}	DN (NPS) ≤ DN 100 (NPS 4)	Class ≤ 1500	Optional ^{b e}	Required ^d	Optional _{b e f}	Required	Optional _{b e}	Optional ^{b e}
		Class > 1500	Required		Required			Required
	DN (NPS) > DN 100 (NPS 4)	Class ≤ 600	Optional ^{b e}		Optional _{b e f}			Optional ^{b e}
		Class > 600	Required		Required			Required
NA Not applicable								
^a The backseat test is required for all valves that have the backseat feature, except for bellows seal valves. ^b When an "optional" test is specified by the purchaser, the test shall be performed in addition to the required tests. ^c The high-pressure closure test of resilient-seated valves may degrade subsequent sealing performance in low-pressure service. ^d For power-operated and manually-operated gear-actuated globe valves, including nonreturn-type globe valves, the high-pressure closure test shall be performed at 110 % of the design differential pressure used for sizing of the operator. ^e For valves specified to be double block and bleed (DBB), a double block and bleed successive high-pressure closure test (see 6.6) is required unless specified otherwise by the purchaser. ^f For lubricated plug valves, the high-pressure closure test is mandatory and the low-pressure closure test is optional. ^g In the case where both high- and low-pressure closure testing is to be performed, refer to 6.4.6. ^h Butterfly Category A and Category B definition according to API 609.								

5.3.2 At the manufacturer's option, the backseat test for valves that have the backseat feature may be either a high-pressure or low-pressure test unless stated otherwise in the purchase order.

5.4 High-pressure Closure Test

The high-pressure closure test is required for several valve types, as shown in [Table 1](#). For the valve types for which the high-pressure closure test is optional (according to [Table 1](#)), the valves are still required to be able to pass the test (as a test of the design of the valve closure structure). Results of tests confirming the capacity of the valve design to pass the high-pressure closure test shall be supplied when requested in the purchase order (see [Table 3](#), footnotes b and c for calculation of test pressure). DBB testing per [6.6](#) or [6.7](#) satisfies the high-pressure closure test requirement in lieu of the testing method indicated in [6.5](#).

5.5 High-pressure Pneumatic Shell Test

When specified in the purchase order, a high-pressure pneumatic shell test shall be performed. This test shall be performed after the hydrostatic shell test, using appropriate safety precautions. The pneumatic shell test pressure shall be 110 % of the maximum allowable pressure at 38 °C (100 °F) or as specified in the purchase order. Visible leakage is not allowed.

5.6 Test Fluid

5.6.1 For shell, high-pressure backseat, and high-pressure closure tests, the test fluid shall be air, nitrogen, inert gas, kerosene, water, or a noncorrosive liquid with a viscosity not higher than that of water. Unless otherwise specified in the purchase order, the test fluid temperature shall be within the range 5 °C (41 °F) to 38 °C (100 °F).

5.6.2 For the low-pressure closure and low-pressure backseat tests, the test fluid shall be air, nitrogen, or inert gas.

5.6.3 When air or gas is used for closure, shell, or backseat tests, the valve manufacturer shall be capable of demonstrating the adequacy of the method of leakage detection.

5.6.4 Water used for any test can contain water-soluble oil and/or corrosion inhibitor. When specified by the purchaser, a wetting agent and/or an antifreeze (e.g., glycol) shall be included in the water. For testing of austenitic stainless-steel valves, water with chloride content not exceeding 50 ppm shall be used. The valve manufacturer shall be able to document the chloride content.

5.7 Test Pressures

5.7.1 The shell test pressure shall be as listed in [Table 2](#).

5.7.2 Backseat and closure test pressures shall be as listed in [Table 3](#).

5.8 Test Duration

For each type of test, the required test pressure shall be maintained for at least the minimum time specified in [Table 4](#).

Table 2—Shell Test Pressures ^d

Valve Type	ASME class	Shell Test Pressure (Minimum)	
		Bar Gauge	Pounds per Square Inch Gauge (psig)
Ductile iron	150	26	400
	300	66	975
Gray iron			
DN 50 to 300 (NPS 2 to 12)	125	25	350
DN 350 to 1200 (NPS 14 to 48)		19	265
Gray iron			
DN 50 to 300 (NPS 2 to 12)	250	61	875
DN 350 to 600 (NPS 14 to 24)		37	525
Steel and nonferrous alloys			
Flanged	150 to 2500	b	b
Butt weld	150 to 4500	b	b
Threaded ^a and socket weld	800	c	c
	150 to 4500	b	b
^a ASME B16.34 limits threaded-end valves to class 2500 and lower. ^b Per ASME B16.34, the hydrostatic shell test pressure shall be 1½ times the pressure rating at 38 °C (100 °F), rounded off to the next higher bar (25 psig). The attachment of hubs, flanges, or other end connections with ambient working pressures lower than the primary valve assembly will require lower test pressures. ^c For class 800 valves, the hydrostatic shell test pressure shall be 1½ times the pressure rating at 38 °C (100 °F), rounded off to the next higher bar (25 psig)—see API Standard 602 for pressure/temperature ratings. ^d Shell test pressure for API Standard 609 Category A valves shall be 1½ times the maximum CWP of the valve.			

Table 3—Backseat and Closure Test Pressures

Test	Test Pressure ^d	
	Bar Gauge	Pounds per Square Inch Gauge (psig)
Valves Except Butterfly and Check		
High-pressure closure and backseat ^a	b	b
Low-pressure closure and backseat ^a	5.5 ± 1.5	80 ± 20
Butterfly Valve		
High-pressure closure	c	c
Low-pressure closure	5.5 ± 1.5	80 ± 20
Check Valve		
High-pressure closure		
Class 125 (cast iron)		
DN 50 to 300 (NPS 2 to 12)	14	200
DN 350 to 1200 (NPS 14 to 48)	11	150
Class 250 (cast iron)		
DN 50 to 300 (NPS 2 to 12)	35	500
DN 350 to 600 (NPS 14 to 48)	21	300
Class 150 (ductile iron)	17	250
Class 300 (ductile iron)	44	640
Carbon, alloy, stainless steel, and special alloys	b	b
Low-pressure closure (see Table 1)	5.5 ± 1.5	80 ± 20
^a The backseat test is required for all valves that have the backseat feature, except for bellows seal valves. ^b 110 % of maximum allowable pressure at 38 °C (100 °F) in accordance with the applicable purchase specification. ^c 110 % of design differential pressure at 38 °C (100 °F) in accordance with the applicable purchase specification. ^d Single values shown are minimum test pressures. Values with a tolerance indicate both minimum and maximum test pressures.		

Table 4—Duration of Required Test Pressure

Valve Size		Minimum Test Duration (Seconds) ^a			
DN	NPS	Shell	Backseat (for Valves with Backseat Feature)	Closure Check Valves (API 594)	Closure Other Valves ^b
≤ 50	≤ 2	15	15	60	15
65 to 150	2½ to 6	60	60	60	60
200 to 300	8 to 12	120	60	120	120
350 to 600	14 to 24	300	60	120	120
> 600	>24	600	120	240	240
^a The test duration is the period of inspection after the valve is fully prepared and is under full pressure. ^b Test duration value provided is for each seat sealing direction (e.g., unidirectional).					

5.9 Test Leakage

5.9.1 Shell, Stem Seals, and Backseat

5.9.1.1 Where no visually detectable leakage is permitted, the following definitions apply:

- a) If the test fluid is a liquid, there shall be no visible evidence of drops or wetting of the external surfaces of the test valve.
- b) If the test fluid is air, nitrogen, or inert gas, no leakage will be revealed by the established detection method.

5.9.1.2 For shell tests, visually detectable leakage through the pressure boundary walls and any fixed body joint is not permitted.

5.9.1.3 For backseat tests, visually detectable leakage is not permitted.

5.9.1.4 For valves with adjustable stem seals, leakage through the stem seals during the shell test shall not be cause for rejection when tested at prescribed pressure and duration. However, the manufacturer shall demonstrate that the stem seals are capable of retaining pressure at least equal to the 38 °C (100 °F) valve rating without visible leakage.

5.9.1.5 For valves with nonadjustable stem seals (O-rings, fixed single rings, and the like), visually detectable leakage during the shell test is not permitted.

5.9.2 Closure

5.9.2.1 For both the low-pressure closure test and the high-pressure closure test, visual evidence of leakage through the disc, behind the seat rings, or past the shaft seals (of valves that have this feature) is not permitted and structural damage is not permitted [plastic (permanent) deformation of resilient seats and seals is not considered structural damage]. The allowable rate for leakage of test fluid at the seat-sealing surface interface, for the duration of the tests, is listed in [Table 5](#).

5.9.2.2 The allowable leakage rate for closure tests of valves with nonmetallic (e.g., ceramic) seat materials shall be equal to that specified in [Table 5](#) for a metal-seated valve of equivalent size and type.

Table 5—Maximum Allowable Leakage Rates for Closure Tests ^c

Valve Size		All Resilient-seated Valves ^b	Metal Seated Valves Except Check				Metal Seated Check Valves		
DN (mm)	NPS (in.)		Liquid Test ^a (drops/min)	Liquid Test (ml/min)	Gas Test ^a (bubbles/min)	Gas Test (ml/min)	Liquid Test (ml/min)	Gas Test (m ³ /h)	Gas Test (ft ³ /h)
≤ 50	≤ 2	0	0 ^b	0 ^b	0 ^b	0 ^b	6	0.08	3
65	2½	0	5	0.31	10	0.10	7.5	0.11	3.75
80	3	0	6	0.38	12	0.12	9	0.13	4.5
100	4	0	8	0.50	16	0.16	12	0.17	6
125	5	0	10	0.63	20	0.20	15	0.21	7.5
150	6	0	12	0.75	24	0.24	18	0.25	9
200	8	0	16	1.00	32	0.32	24	0.34	12
250	10	0	20	1.25	40	0.40	30	0.42	15
300	12	0	24	1.50	48	0.48	36	0.50	18
350	14	0	28	1.75	56	0.56	42	0.59	21
400	16	0	32	2.00	64	0.64	48	0.67	24
450	18	0	36	2.25	72	0.72	54	0.76	27
500	20	0	40	2.50	80	0.80	60	0.84	30
600	24	0	48	3.00	96	0.96	72	1.01	36
650	26	0	52	3.25	104	1.04	78	1.09	39
700	28	0	56	3.50	112	1.12	84	1.18	42
750	30	0	60	3.75	120	1.20	90	1.26	45
800	32	0	64	4.00	128	1.28	96	1.34	48
900	36	0	72	4.50	144	1.44	108	1.51	54
1000	40	0	80	5.00	160	1.60	120	1.68	60
1050	42	0	84	5.25	168	1.68	126	1.76	63
1200	48	0	96	6.00	192	1.92	144	2.02	72

^a For the liquid test, 1 mL is considered equivalent to 16 drops. For the gas test, 1 mL is considered equivalent to 100 bubbles.

^b There shall be no leakage for the minimum specified test duration (see Table 4). For a liquid test, 0 drops means no visible leakage per minimum specified test duration. For a standard gas test, 0 bubbles means less than 1 bubble per minimum specified test duration. For a high-pressure pneumatic closure test, refer to 5.4.

^c Leakage rates for sizes above DN 1200 (NPS 48) shall be calculated by the following formulas:
 Liquid test for metal seated valves except check: 2 x NPS (drops/min)
 Gas test for metal seated valves except check: 4 x NPS (bubbles/min)
 Liquid test for metal seated check valves: 3 x NPS (cc/min)
 Gas test for metal seated check valves: 0.042 x NPS (m³/h)
 Gas test for metal seated check valves: 1.5 x NPS (ft³/h)

5.9.2.3 As an alternative, displacement measuring devices may be used, provided that the detectable leakage rate is equivalent to that given in Table 5, the valve manufacturer shall demonstrate and validate that the procedure yields results equivalent to the requirements of this standard, and the device has been accepted by agreement between the purchaser and the manufacturer.

5.9.2.4 When volumetric devices (bubblers) such as shown in Figure 1 are used to measure leakage, the test duration shall not begin until flow through the test tubing is established and stabilized. The device shall be calibrated to yield results equivalent to the units per minute listed in Table 5.

5.9.2.5 The tube end shall be cut square and smooth with no chamfers or burrs, and the tube axis shall be perpendicular to the surface of the water (see Figure 1).

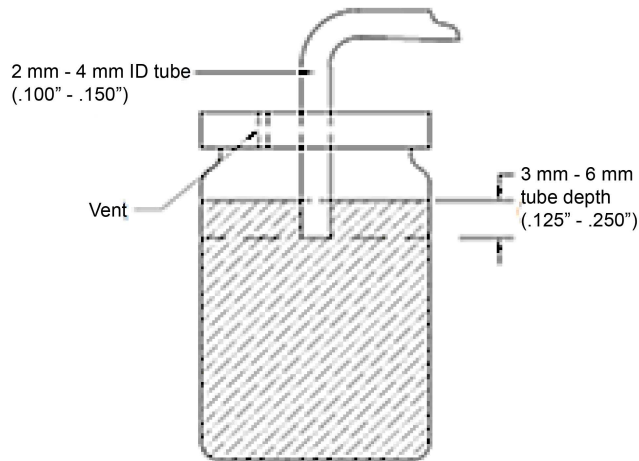


Figure 1—Volumetric Device

5.9.2.6 Leakage rates shall be based upon the DN (NPS) of the valve regardless of whether the valve is full or reduced bore.

6 Pressure Test Procedures

6.1 General

6.1.1 Valves designed to permit emergency or supplemental introduction of an injectable sealant to the seat area shall be tested with the injection system empty and not in use, except for lubricated plug valves.

6.1.2 When a liquid is used as the test fluid, the valve shall be essentially free from trapped air during the test.

6.1.3 Required protective coatings, such as paint, which can mask surface defects, shall not be applied to any surface before inspection or pressure testing (phosphatizing and similar chemical conversion processes used to protect valve surfaces are acceptable even if applied before the tests, provided that they will not seal off porosity).

6.1.4 When closure testing valves, the valve manufacturer's test procedure shall ensure that excessive force is not used to close the valve. The applied force may be determined from the appropriate figures in MSS SP-91^[9] and shall be made available to the purchaser or testing facility upon request. The use of a supplemental leveraging device to aid in achieving a passing leakage rate is acceptable, provided that the applied force does not exceed the manufacturer's documented value. Where the manufacturer does not document or otherwise make available the maximum permissible force for valve closure, the test procedure shall restrict the use of supplemental leveraging devices.

6.2 Backseat Test

6.2.1 The backseat test is required for all valves (except for bellows seal valves) that have the backseat feature and shall be performed by applying pressure inside the assembled valve with the valve ends closed, the valve fully open, and the packing gland loose or packing not installed. If the backseat test is performed after the shell test, the packing shall be installed and/or packing glands retightened after the backseat test.

6.2.2 For valves DN 100 (NPS 4) and smaller, the backseat test may be combined with the shell test when volumetric devices are used to monitor leakage. When tested by this method, the packing shall be loose and the backseat can be tested visually at the same time (e.g., soap test). The valve shall pass the test if there is no visible leakage. The manufacturer shall be responsible for demonstrating that the packing has no visible leakage at the valve's rated pressure at 38 °C (100 °F).

6.2.3 The successful completion of the backseat test shall not be construed as a recommendation by the valve manufacturer that, while the valve is pressurized, the valve may be repacked or packing may be replaced.

6.3 Shell Test

Except as provided in [6.2.2](#), the shell test shall be made by applying the pressure inside the assembled valve with the valve ends closed, the valve partially open, and any packing gland tight enough to maintain the test pressure, thereby (except for bellows seal valves) testing the stuffing box.

6.4 Low-pressure Closure Test

6.4.1 The low-pressure closure test shall be performed with the seat sealing surface interface clean and free from oil, grease, and sealant. If necessary to prevent galling, the sealing surfaces may be coated with a film of oil that is not heavier than kerosene. This requirement does not apply to a valve that uses a lubricant as its primary seal (e.g., lubricated plug valves).

6.4.2 Any leakage at the seat sealing surface interface, behind the seat ring, or through the disc on the open side of the valve shall be detected when bubbles are observed coming from the closure (disc, seat, and seat ring), covered with water or leakage that is channeled to a volumetric device for measurement.

6.4.3 When closure testing gate, plug, and downstream seated ball valves (such as floating ball valves), a method of testing seat leakage shall be used that fills and fully pressurizes the body cavity to the test pressure between the seats and the bonnet area, as applicable, with the test fluid. This will ensure that no seat leakage can escape detection because of gradual filling of these volumes during the test period. For a valve that has only one seat and no center cavity (e.g., a butterfly valve), the pressure shall be applied to the side of the valve for which closure is being tested.

For a valve designed to close against pressure from either direction (e.g., gate valve), the pressure shall be applied successively to each side of the closed valve with the other side at atmospheric pressure to check for leakage at the atmospheric side of the closure. For a globe valve, pressure shall be applied in one direction, with the pressure applied under the disc.

For a valve designed to close against pressure from one direction only and so marked, the pressure shall be applied on the pressure side of the valve only. For a check valve, the pressure shall be applied on the downstream side.

A closure test is required only in one direction for butterfly valves furnished with encapsulation or resilient internal liners and designed for use with class 125 or class 150 flanges (API Standard 609, Category A valves). For other resilient-seated butterfly valves (API Standard 609, Category B valves), the closure test is required in both directions. For butterfly valves with a preferred flow direction, the closure test in the nonpreferred direction shall be based on the reduced differential pressure rating in that direction.

6.4.4 Trapping test air or gas in the body cavity between the seats of a one-piece (solid or flexible) wedge gate valve and subsequently covering the seats with water or coating them with soap or a similar solution does not constitute an acceptable low-pressure closure test.

6.4.5 If a tapped connection is made in the body cavity to permit testing procedures, the connection shall be in accordance with MSS SP-45 and shall be fitted before shipment with a solid pipe plug (in accordance with ASME B16.11), the material composition of which is equivalent to that of the valve shell.

6.4.6 In the case where both high- and low-pressure closure testing is to be performed, the manufacturer should perform the high-pressure closure test before low-pressure testing is performed.

NOTE The high-pressure closure test of resilient-seated valves may degrade subsequent sealing performance in low-pressure service.

6.5 High-pressure Closure Test

The procedure for the high-pressure closure test shall be the same as the procedure for the low-pressure closure test except that, in the case of a liquid test, leakage shall be detected when drops, not bubbles (as described in [6.4](#)), are observed. Optional DBB closure tests shall be as described in [6.6](#) and/or 6.7 in lieu of [5.4](#). In the case where the purchaser has not specified which optional test is desired, the closure test in [6.6](#) shall be performed.

6.6 Double Block and Bleed Successive High- pressure Closure Test

With the valve unseated and partially open, the valve and its cavity shall be completely filled with test fluid. The valve shall then be closed and excess cavity test fluid drained out through an opening in the bottom of the valve (Position “G” per ASME B16.34). Where operational considerations do not allow for an opening in the bottom of the valve, an alternative opening location may be specified by the purchaser, and the valve shall be tested in a position that results in the alternative opening location being at the bottom of the valve during test. Testing in all positions and specifically in alternative positions will require procedures that meet the requirement of [6.1.2](#).

The pressure shall be applied successively to each side of the closed valve with the other side at atmospheric pressure and leakage into the body cavity shall be checked through an opening in the bottom of the valve. Test duration for each seat shall be no less than the values provided in [Table 4](#). Maximum allowable leakage rates shall be per [Table 5](#).

6.7 Double Block and Bleed Simultaneous High-pressure Closure Test

With the valve unseated and partially open, the valve and its cavity shall be completely filled with test fluid. The valve shall then be closed and excess cavity test fluid drained out through an opening in the bottom of the valve (Position “G” per ASME B16.34). Where operational considerations do not allow for an opening in the bottom of the valve, an alternative opening location may be specified by the purchaser, and the valve shall be tested in a position that results in the alternative opening location being at the bottom of the valve during test. Testing in all positions—specifically in alternative positions—will require procedures that meet the requirement of [6.1.2](#).

The pressure shall be applied simultaneously from both sides of the closure through the valve bore, and leakage into the body cavity shall be checked through an opening in the bottom of the valve. The test duration for both seats simultaneously shall be no less than twice ($2 \times$) the values provided in [Table 4](#). Maximum allowable leakage rates shall be per [Table 5](#).

NOTE This test is the same as referenced as double block and bleed (DBB) in API 6D^[8].

7 Valve Certification and Retesting

7.1 Certificate of Compliance

When specified by the purchaser, the valve manufacturer shall submit to the purchaser a certificate of compliance as required in the purchase order.

7.2 Retesting

A completed valve does not require retesting unless inspection by the purchaser is specified in the purchase order. This retesting may be waived by the purchaser’s inspector upon written certification by the manufacturer that the valve has been inspected, tested, and examined for conformance with the requirements of this standard. Painted valves need not have paint removed for retesting. Stored valves shall be commercially cleaned before retesting and before shipment.

7.3 Material Test Report

Where material test reports (MTRs) are requested with the purchase order for specific valve components, the manufacturer may transcribe data produced by other organizations, provided that:

- the manufacturer accepts responsibility for the accuracy and authenticity of the data and maintains a file containing the test report from the originator of the data;
- the manufacturer shall certify (on the MTR) the source of the data and the location of the file containing the test report from the originator of the data.

Annex A (informative)

Information to Be Specified by the Purchaser

Information to be specified by the purchaser:

- 1) Deviations from this standard should be specifically stated in the purchase order.
- 2) If this standard is used for valves not covered by this standard, the purchaser will specify the extent to which the standard is to be applied.
- 3) If required, the following will be specified in the purchase order:
 - a) inspections by the purchaser at the valve manufacturer's plant (see [4.1](#));
 - b) inspections by the purchaser outside the valve manufacturer's plant (see [4.2](#));
 - c) address for inspection notices (see [4.3](#));
 - d) any supplementary examination required (see [4.6](#));
 - e) type of backseat test (see [5.3.2](#));
 - f) optional low-pressure closure test (see [Table 1](#) and 6.4);
 - g) optional high-pressure closure test (see [Table 1](#), 5.4, and 6.5);
 - h) optional high-pressure pneumatic shell test (see [5.5](#));
 - i) optional DBB successive high-pressure closure test with optional drain location (see [6.6](#));
 - j) optional DBB simultaneous high-pressure closure test with optional drain location (see [6.7](#));
 - k) test fluid (see [5.6](#));
 - l) use of a wetting agent in the test water (see [5.6.4](#));
 - m) certificate of compliance (see [7.1](#));
 - n) components for which MTRs are requested (see [7.3](#)).

Bibliography

- [1] API Standard 599, *Metal Plug Valves—Flanged, Threaded, and Welding Ends*
- [2] API Standard 600, *Steel Gate Valves—Flanged and Butt-welding Ends, Bolted Bonnets*
- [3] API Standard 603, *Corrosion-resistant, Bolted Bonnet Gate Valves—Flanged and Butt-welding Ends*
- [4] API Standard 608, *Metal Ball Valves—Flanged, Threaded, and Welding Ends*
- [5] API Standard 623, *Steel Globe Valves—Flanged and Butt-welding Ends, Bolted Bonnets*
- [6] API Recommended Practice 591, *Process Valve Qualification Procedure*
- [7] API Recommended Practice 621, *Reconditioning of Metallic Gate, Globe, and Check Valves*
- [8] API Specification 6D, *Specification for Pipeline Valves*
- [9] MSS SP-91, *Guidelines for Manual Operation of Valves*



200 Massachusetts Avenue, NW
Suite 1100
Washington, DC 20001-5571
USA

202-682-8000

Additional copies are available online at www.api.org/pubs

Phone Orders: 1-800-854-7179 (Toll-free in the U.S. and Canada)
303-397-7956 (Local and International)
Fax Orders: 303-397-2740

Information about API publications, programs and services is available on the web at www.api.org.

Product No. C59811